

SG2K-S/SG2K5-S/SG3K-S

Residential Single Phase Inverter



HIGH YIELD

- Higher yield with Max. efficiency 98.2 %, European efficiency 97.7 %
- 12.5 A MPPT current, and compatible with bifacial modules
- Flexible PV string configurations, DC/AC ratio up to 1.4

SMART MANAGEMENT

- Easy local and online monitoring via App or Web
- Export power control with smart energy meter


SAFE AND DURABLE

- Built-in surge arresters and residual current protection
- High anti-corrosion with aluminum alloy die casting


EASY AND USER FRIENDLY

- 8.5 kg compact design, plug and play installation
- Fast commissioning via LCD

CIRCUIT DIAGRAM

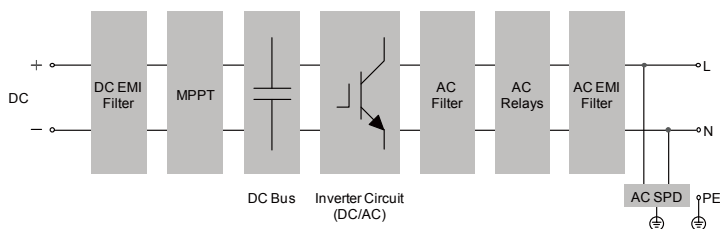

EFFICIENCY CURVE

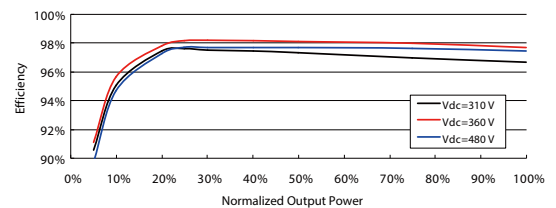

Type designation	SG2K-S	SG2K5-S	SG3K-S
Input (DC)			
Max. PV input voltage		600 V	
Min. PV input voltage / Startup voltage		90 V / 120 V	
Nominal input voltage		360 V	
MPP voltage range		90 V – 560 V	
MPP voltage range for nominal power	210 V – 480 V	260 V – 480 V	310 V – 480 V
No. of MPPTs		1	
Max. number of PV strings per MPPT		1	
Max. PV input current		12.5 A	
Max. PV short-circuit current		15 A	
Output (AC)			
AC output power	2000 VA	2500 VA	3000 VA
Max. AC output current	9.1 A	11.3 A	13.7 A
Nominal AC voltage		230 Vac	
AC voltage range		180 Vac – 276 Vac	
Nominal grid frequency		50 Hz / 60 Hz	
Grid frequency range		45 Hz – 55 Hz / 55 Hz – 65 Hz	
Total harmonic distortion (THD)		< 3 % (of nominal power)	
Power factor		> 0.99 / 0.8 leading – 0.8 lagging	
Feed-in phases / Connection phases		1 / 1	
Efficiency			
Max. efficiency / European efficiency	98.2 % / 97.2 %	98.2 % / 97.5 %	98.2 % / 97.7 %
Protection			
PV reverse connection protection		Yes	
AC short circuit protection		Yes	
Leakage current protection		Yes	
Grid monitoring		Yes	
PV string current monitoring		Yes	
DC switch		No	
AFCI		No	
24H loads monitoring		No	
Overvoltage protection		AC Type II	
General Data			
Dimensions (W*H*D)		300*370*125 mm	
Weight		8.5 kg	
Isolation method		Transformerless	
Ingress protection rating		IP65	
Power loss in night mode		< 1W	
Operating ambient temperature		-25 °C to 60 °C (>45 °C derating)	
Allowable relative humidity		0 – 100 %	
Cooling method		Natural cooling	
Max. operating altitude		4000 m (> 2000 m derating)	
Display / Communication		LCD / WLAN	
PV connection type		MC4 (max. 6 mm ²)	
AC connection type		Plug and play connector (max. 6 mm ²)	
Certification	IEC62109-1, IEC62109-2, IEC62116, IEC61727, EN 61000-6-2, EN 61000-6-3, AS/NZS 4777.2		
Grid support	Active & reactive power control, power ramp rate control		

SG3K-D/SG5K-D

Residential Single Phase Inverter



HIGH YIELD

- Higher yield with Max. efficiency 98.4 %, European efficiency 98.0 %
- 12.5 A MPPT current, and compatible with bifacial modules
- Flexible PV string configurations, DC/AC ratio up to 1.4

SMART MANAGEMENT

- Easy local and online monitoring via App or Web
- Export power control with smart energy meter


SAFE AND DURABLE

- Built-in surge arresters and residual current protection
- High anti-corrosion with aluminum alloy die casting


EASY AND USER FRIENDLY

- 11.5 kg compact design, plug and play installation
- Fast commissioning via LCD

CIRCUIT DIAGRAM

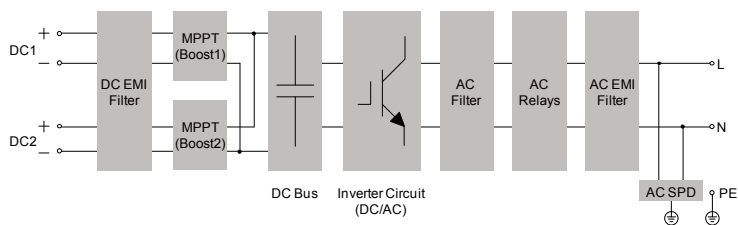

EFFICIENCY CURVE

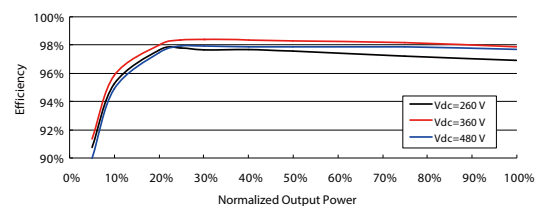

Type designation	SG3K-D	SG5K-D
Input (DC)		
Max. PV input voltage	600 V	
Min. PV input voltage / Startup voltage	90 V / 120 V	
Nominal input voltage	360 V	
MPP voltage range	90 V – 560 V	
MPP voltage range for nominal power	160 V – 480 V	240 V – 480 V
No. of MPPTs	2	
Max. number of PV strings per MPPT	1	
Max. PV input current	25 A (12.5 A / 12.5 A)	
Max. PV short-circuit current	30 A (15 A / 15 A)	
Output Side Data		
AC output power	3000 VA	4999 VA
Max. AC output current	13.7 A	21.7 A
Nominal AC voltage	230 Vac	
AC voltage range	180 Vac – 276 Vac	
Nominal grid frequency	50 Hz / 60 Hz	
Grid frequency range	45 Hz – 55 Hz / 55 Hz – 65 Hz	
Total harmonic distortion (THD)	< 3 % (of nominal power)	
Power factor	> 0.99 / 0.8 leading – 0.8 lagging	
Feed-in phases / Connection phases	1 / 1	
Efficiency		
Max. efficiency	98.4 %	
Max. European efficiency	97.7 %	98.0 %
Protection		
PV reverse connection protection	Yes	
AC short circuit protection	Yes	
Leakage current protection	Yes	
Grid monitoring	Yes	
PV string current monitoring	Yes	
DC switch	No	
AFCI	No	
24H loads monitoring	No	
Overvoltage protection	AC Type II	
General Data		
Dimensions (W*H*D)	360*390*133 mm	
Weight	11.5 kg	
Isolation method	Transformerless	
Ingress protection rating	IP65	
Power loss in night mode	< 1 W	
Operating ambient temperature	-25 °C to 60 °C (>45 °C derating)	
Allowable relative humidity	0 – 100 %	
Cooling method	Natural cooling	
Max. operating altitude	4000 m (> 2000 m derating)	
Display / Communication	LCD / WLAN	
PV connection type	MC4 (max. 6 mm ²)	
AC connection type	Plug and play connector (max. 6 mm ²)	
Certification	IEC62109-1, IEC62109-2, IEC62116, IEC61727, EN 61000-6-2, EN 61000-6-3, AS/NZS 4777.2	
Grid support	Active & reactive power control, power ramp rate control	